


NOTA / NOTE:

- * Prezentul plan se va consulta impreuna cu planurile: PT.2A.03.06.IS.05.001, PT.2A.03.06.IS.05.005, PT.2A.03.06.IS.05.006, PT.2A.03.06.IS.05.007, PT.2A.03.06.IS.05.008, PT.2A.03.06.IS.05.009, PT.2A.03.06.IS.07.009, PT.2A.03.06.IS.07.010, PT.2A.03.06.IS.07.011, PT.2A.03.06.IS.14.001 și PT.2A.03.06.IS.14.005.
- * Legenda se va citi in planul: PT.2A.03.06.IS.14.001.
- * The present design will be consult with the following drawings: PT.2A.03.06.IS.05.005, PT.2A.03.06.IS.05.006, PT.2A.03.06.IS.05.007, PT.2A.03.06.IS.05.008, PT.2A.03.06.IS.05.009, PT.2A.03.06.IS.07.010, PT.2A.03.06.IS.07.011, PT.2A.03.06.IS.14.001 and PT.2A.03.06.IS.14.005.
- * The cartouche will be consult in the drawing no: PT.2A.03.06.IS.14.001.



Profil longitudinal 1 Longitudinal profile no. 1

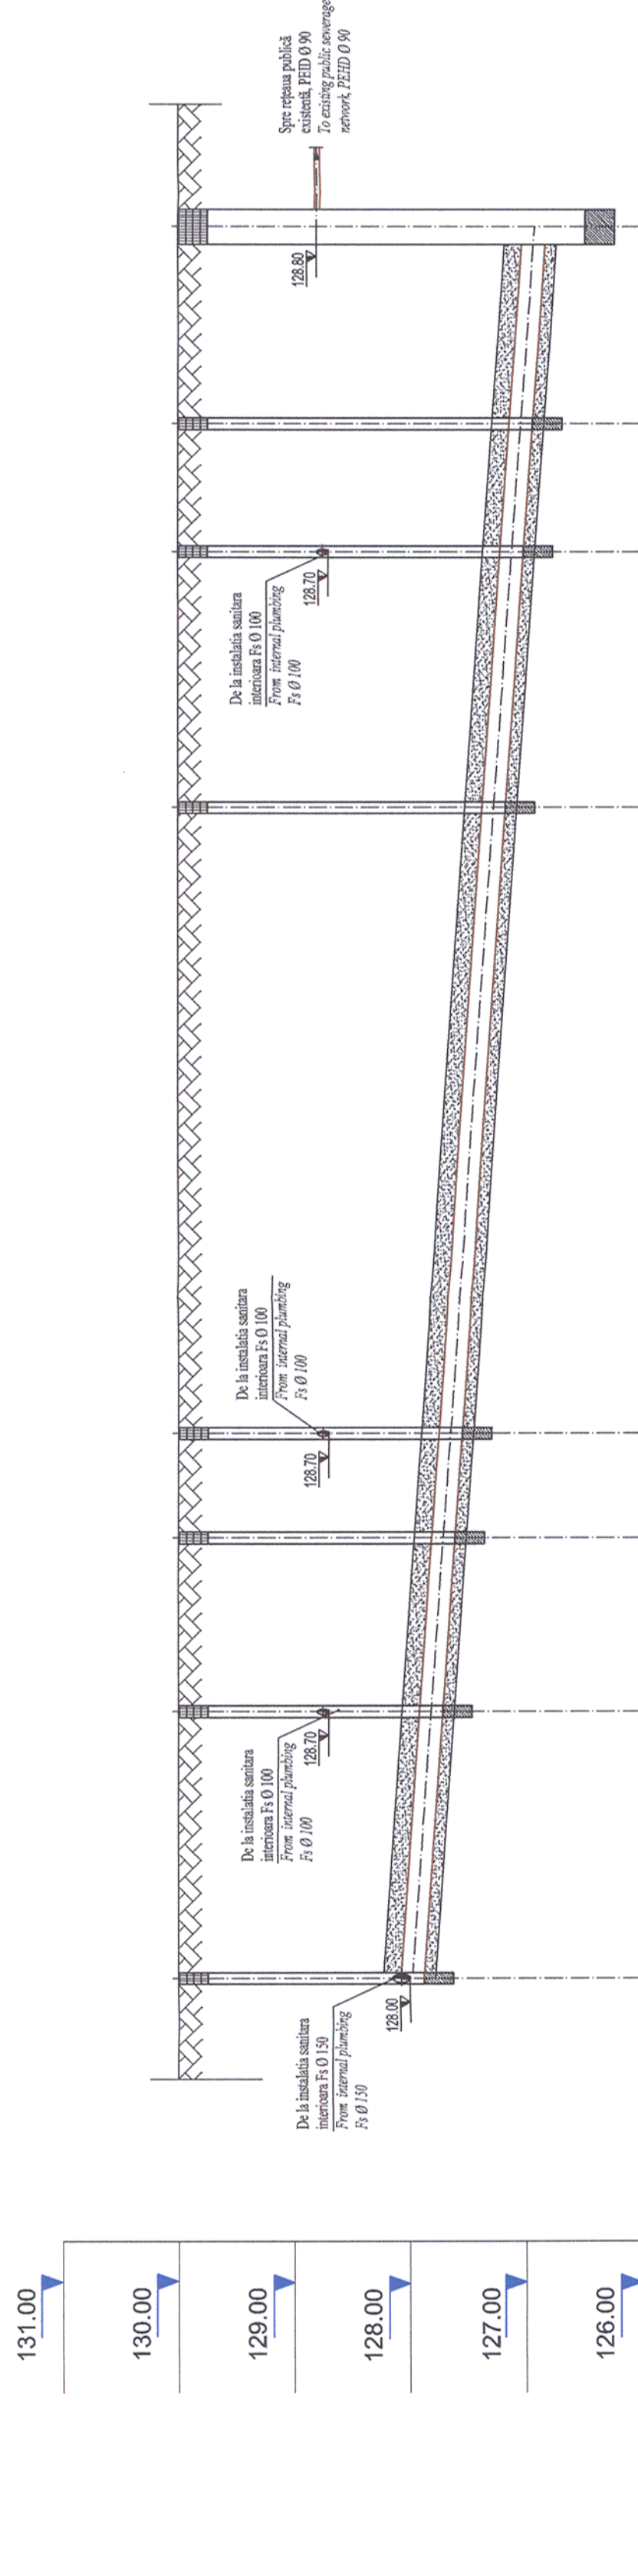

DENUMIRE CAMIN NUMBER OF CHAMBER	M16	M17	M18	M19	M6	M6	M10	SPAU
COTA TEREN AMENAJAT APPLIANCE GROUND QUOTA	130.00	130.00	130.00	130.00	130.00	130.00	130.00	130.00
COTA CAPAC CAMIN CHAMBER COVER QUOTA	127.90	127.74	127.63	127.57	127.19	127.04	126.96	126.84
COTA RADIER CAMIN (tub) CHAMBER FOUNDATION QUOTA (tube)	2.10	2.26	2.37	2.43	2.81	2.96	3.04	3.16
ADANCIME CAMIN DEPTH OF THE CHAMBER	23 m	15 m	9 m	47 m	54 m	22 m	11 m	17 m
DISTANTA INTRE CAMINE ON THE CENTER CHAMBER DISTANCE								
DISTANTE CUMULATE LENGTH-ADDED	0 m	23 m	38 m	47 m	101 m	123 m	134 m	151 m
PANTA TUB CANALIZARE SEWAGE SLOAPE	7 ‰							
DIAMETRU + MATERIAL TUB CANAL DIAMETER+TUBE MATERIAL	Tub PEGO, tip SN4, Ø 200 mm/ COPE tube, SN4 type, Ø 200 mm							

EXECUTAREA LUCRARILOR DE MONTAJ A RETELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELE DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

- * Cerinta de calitate minima corespunzator nivelului de performanta este Is - in conformitate cu prevederile H.G. 925 - 1995.
- * Categoria de importanta a lucrarilor hidrotehnice este "C" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
- * Minimum quality requirement adequate performance level are Is - in correspondance with G.R. 925 - 1995.
- * Importance class for hydrotechnical works is "C" (normal) - in correspondance with STAS 2473 - 1983 forecast.

Verificator / Expert Checker / Expert	Semnatura Signature	Referat / Expertiza Report / Expertise
European Investment Bank	MINISTERUL TRANSPORTURILOR	
Cerinta Requirement	BENEFICIAR / BENEFICIARY :	COMPANIA NATIONALA DE CAI FERATE "CFR" SA
PROIECTANT / DESIGNER:		
Aprobat Approved	Sef de echipa Team leader	C. Teodorescu
Verificat Checked	Expert Cheile Key Expert	
Subcontractant / Subcontractor		
Aprobat Approved	Adjunct Sef de echipa Deputy Team leader	A.M. Baicu
Proiectat Designed	Inginer Engineer	Fl. Duță
"Reabilitarea liniei c.f. Frontieră - Curtici - Simeria, parte componentă a coridorului IV Pan - European pentru circulația trenurilor cu viteză maximă de 160 km/h"		Project 9j 35311.1
"Rehabilitation of the Railway Line Border - Curtici - Simeria, component Part of the IV Pan - European Corridor for the Trains Circulation with maximum speed of 160 km/h"		Faza / Phase: PTH+CS / TD+TS
Denumire desen / Drawing name: Statia CFR RADNA. Rețea exterioară de canalizare apă uzată menajeră. Profil longitudinal prin canalizare 1. RADNA Railway Station. Wastewater sewerage network. Longitudinal profile no. 1.		
Scara / Scale	Revizia / Revision	Cod desen / Drawing Code
Oriz - 1: 500; Vert. - 1: 50		PT.2A.03.06.IS.14.004
		Nr / No 01/01