



## Profil longitudinal 1 Longitudinal profile no. 1

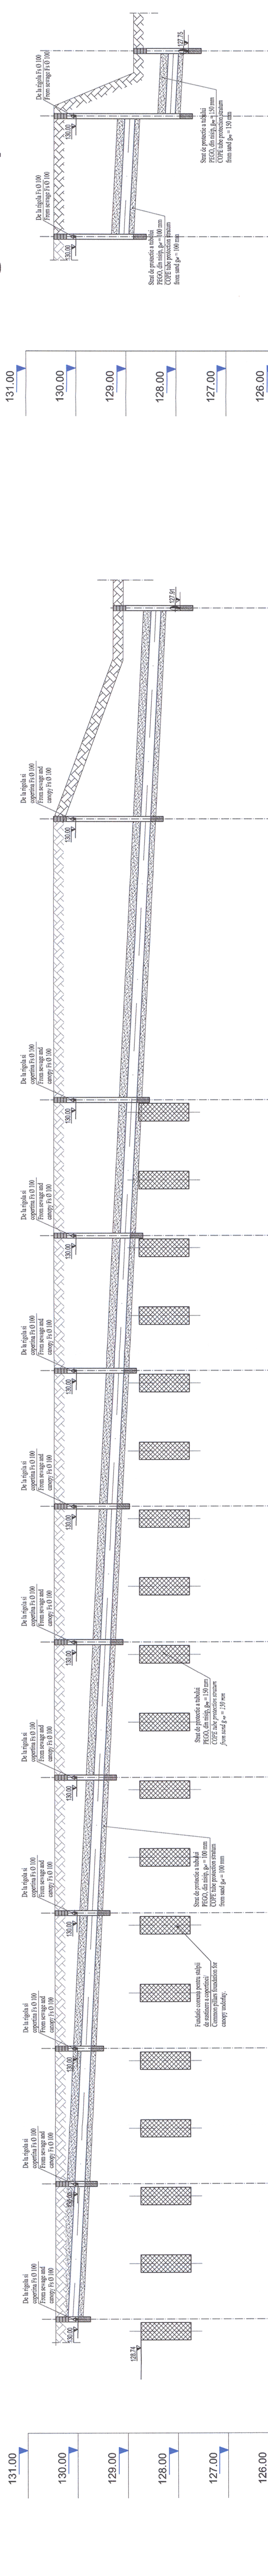

DE NUMIRE CAMIN NUMBER OF CHAMBER	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
COTA TERENI AMENAJAT APPLIANCE GROUND QUOTA	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44
COTA CAPAC CAMIN CHAMBER COVER QUOTA	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44	130.44
COTA RADIER CAMIN (la) CHAMBER FOUNDATION QUOTA (la)	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59	129.59
ADNICHIE CAMIN DEPTH OF THE CHAMBER	0.62	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.56
DISTANTA INTRE CAMINE ON THE CENTER CHAMBER DISTANCE	27m	27m	27m	27m	27m	27m	27m	27m	27m	27m	27m	27m	27m	27m	27m
DISTANTE CUMULATE LENGTH-ADDED	0.62	1.18	1.74	2.30	2.86	3.42	3.98	4.54	5.10	5.66	6.22	6.78	7.34	7.90	8.46
PANTA TUB CANALIZARE SEWAGE SLOAPE	5 ‰														
DIAMETRU + MATERIAL TUB CANAL DIAMETER/TUBE MATERIAL	Tub PEGO, tip SN4, Ø 200 mm														

## Profil longitudinal 2 Longitudinal profile no. 2

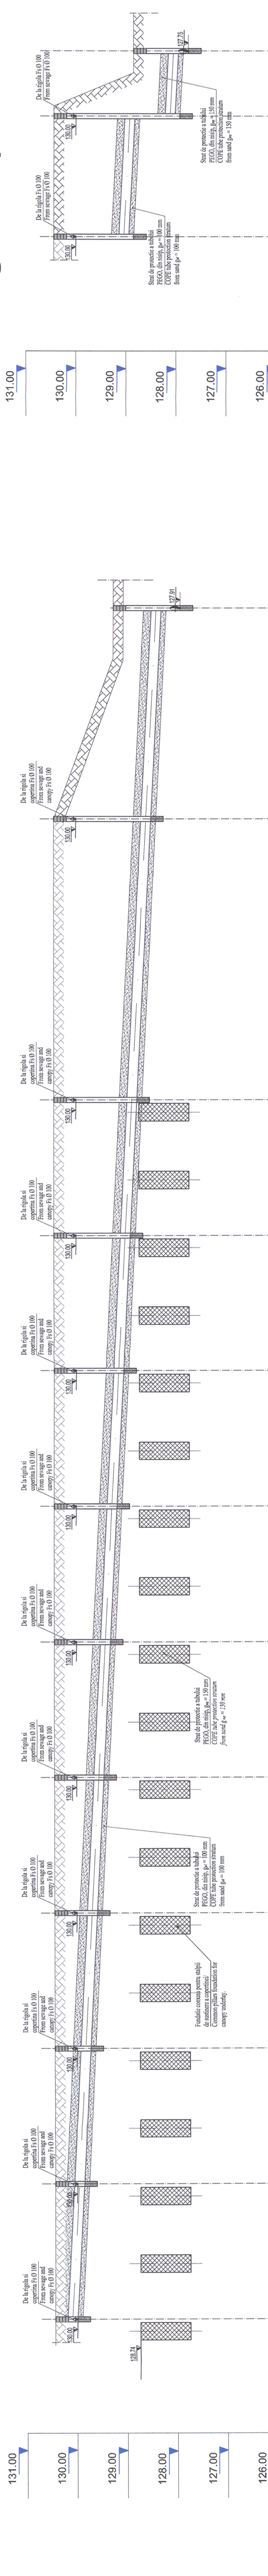


DE NUMIRE CAMIN NUMBER OF CHAMBER	P12	P13	P14	P15
COTA TERENI AMENAJAT APPLIANCE GROUND QUOTA	130.44	130.44	130.44	130.44
COTA CAPAC CAMIN CHAMBER COVER QUOTA	130.44	130.44	130.44	130.44
COTA RADIER CAMIN (la) CHAMBER FOUNDATION QUOTA (la)	128.94	128.94	128.94	128.94
ADNICHIE CAMIN DEPTH OF THE CHAMBER	1.50	2.42	1.10	1.10
DISTANTA INTRE CAMINE ON THE CENTER CHAMBER DISTANCE	0 E	24 m	13 m	13 m
DISTANTE CUMULATE LENGTH-ADDED	0 E	24 m	37 m	50 m
PANTA TUB CANALIZARE SEWAGE SLOAPE	5 ‰			
DIAMETRU + MATERIAL TUB CANAL DIAMETER/TUBE MATERIAL	Tub PEGO, tip SN4, Ø 200 mm/			

EXECUTAREA LUCRARILOR DE MONTAJ A RETELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELE DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

- \* Cerinta de calitate minima corespunzator nivelului de performanta este Is - in conformitate cu prevederile H.G. 925 - 1995.
- \* Categoria de importanta a lucrarilor hidrotehnice este "C" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
- \* Minimum quality requirement adequate performance level are Is - in correspondence with G.R. 925 - 1995.
- \* Importance class for hydrotechnical works is "C" (normal) - in accordance with STAS 2473 - 1983 forecast.

NOTA / NOTE:  
 \* Prezenta plan se va consulta impreuna cu planurile: PT.2A.03.06.IS.14.001 și PT.2A.03.06.IS.14.003.  
 \* Legendă se va citi în planul: PT.2A.03.06.IS.14.001.  
 \* The present design will be consult with the following drawings: PT.2A.03.06.IS.14.001 and PT.2A.03.06.IS.14.003.  
 \* The cartouche will be consult in the drawing no: PT.2A.03.06.IS.14.001.

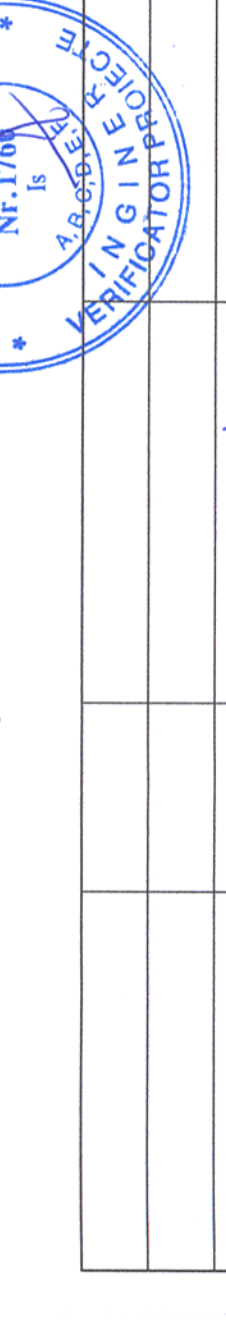

Verificator / Expert  
 Checker / Expert

Semnatura  
 Signature

Referat / Expeniza  
 Report / Expenize

European Investment Bank

MINISTERUL TRANSPORTURILOR

BENEFICIAR / BENEFICIARY :  
 COMPANIA NATIONALA DE CAI FERATE "CFR" SA

PROIECTANT / DESIGNER:

Approbat / Approved	Sef de echipa / Team leader	C. Teodorescu	01.2013
Verificat / Checked	Expert Cheie / Key Expert		01.2013

Subcontractant / Subcontractor

Approbat / Approved	Adjunct Sef de echipa / Deputy Team leader	A.M. Baicu	01.2013
Protectat / Designed	Inginer / Engineer	Fl. Duță	01.2013

Denumire desen / Drawing name:  
 Stația CFR RADINA, Rețea exterioră de canalizare pluvială. Profile longitudinale prin canalizare 1 - 2.  
 RADINA Railway Station. Rainwater sewerage network. Longitudinal profiles no. 1 - 2.

Project 9i	35311.1
Faza / Phase:	PTH+CS / TD+TS

Scara / Scale  
 Oriz - 1: 500; Vert. - 1:50

Revizita / Revision  
 Cod desen / Drawing Code  
 PT.2A.03.06.IS.14.002

Nr / No  
 01/01