


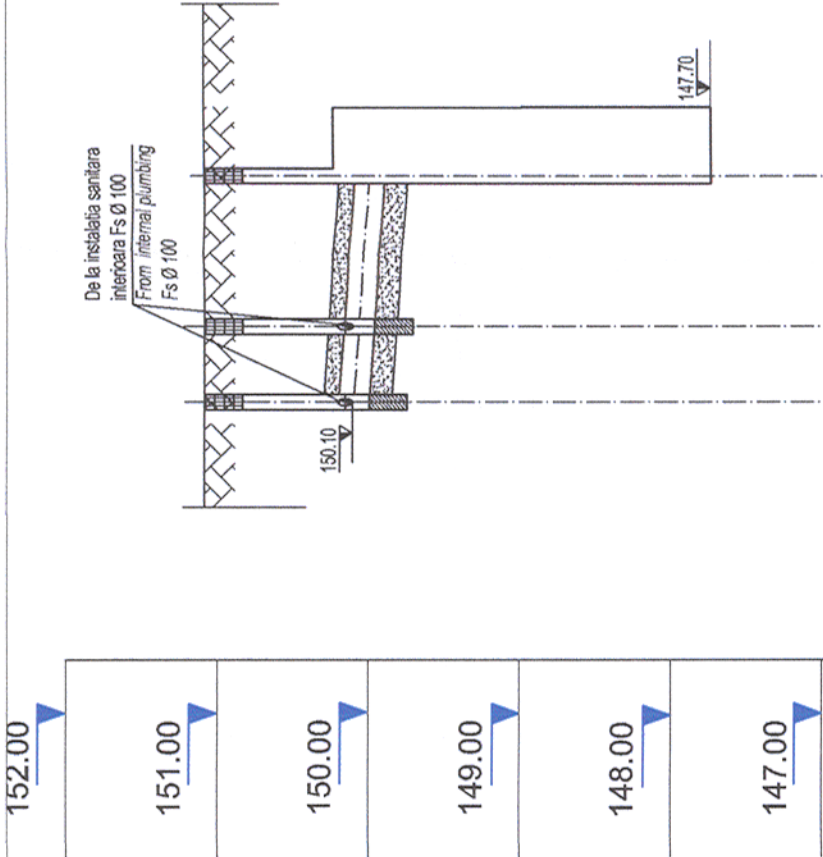

DENUMIRE CAMIN NUMBER OF CHAMBER	M ₁	M ₂	FSV
COTA TEREN AMENAJAT APPLIANCE GROUND QUOTA	126.03	126.03	125.50
COTA CAPAC CAMIN CHAMBER COVER QUOTA	126.03	126.03	125.50
COTA RADIER CAMIN (tub) CHAMBER FOUNDATION QUOTA (tube)	150.00	149.96	149.89
ADANCIME CAMIN DEPTH OF THE CHAMBER	1.03	1.07	1.61
DISTANȚĂ ÎNTRU CAMIN ON THE CENTER CHAMBER DISTANCE	0	5 m	10 m
DISTANȚE CUMULATE LENGTH ADDED	0	6	21
PANTA TUB CANALIZARE SEWAGE SLOAPE	7 ‰		
DIAMETRUL + MATERIAL TUB CANAL DIAMETER+TUBE MATERIAL			

Tub PEGO, tip SN4, Ø 200 mm/
COPE tube, SN4 type, Ø 200 mm

NOTA / NOTE:

- * Prezentul plan se va consulta impreuna cu planurile: PT.2A.03.04.IS.05.001, PT.2A.03.04.IS.05.003 și PT.2A.03.04.IS.14.001 .
- * Legenda se va citi în planul: PT.2A.03.04.IS.14.001.
- * The present design will be consult with the following drawings:PT.2A.03.04.IS. 05.001, PT.2A.03.04.IS.05.003 and PT.2A.03.04.IS.14.001.
- * The cartouche will be consult in the drawing no: PT.2A.03.04.IS.14.001.

EXECUTAREA LUCRARILOR DE MONTAJ A RETELELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELE DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

- * Cerinta de calitate minima corespunzator nivelului de performanta este **Is** - in conformitate cu prevederile H.G. 925 - 1995.
- * Categoria de importanta a lucrarilor hidrotehnice este "**C**" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
- * Minimum quality requirement adequate performance level are **Is** - in correspondance with G.R. 925 - 1995.
- * Importance class for hydrotechnical works is "**C**" (normal) - in correspondance with STAS 2473 - 1983 forecast.



Verificator / Expert Checker / Expert	Cerinta Requirement	Semnatura Signature	Referat / Expertiza Report / Expertise					
BENEFICIAR / BENEFICIARY :		COMPANIA NAȚIONALĂ DE CĂI FERATE "CFR" SA						
PROIECTANT / DESIGNER:				Data Date	Semnatura Signature			
Aprobat Approved	Sef de echipa Team leader	C. Teodorescu		01.2013				
Verificat Checked	Expert Cheie Key Expert	B. Goessler		01.2013				
Subcontractant / Subcontractor								
Aprobat Approved	Adjunct Sef de echipa Deputy Team leader	A.M. Baicu		01.2013				
Proiectat Designed	Inginer Engineer	Fl. Duta		01.2013				
"Reabilitarea liniei c.f. Frontier ă - Curtici - Simeria, parte componentă a coridorului IV Pan - European pentru circulația trenurilor cu viteză maximă de 160 km/h"				Project 9I 35311.1				
"Rehabilitation of the Railway Line Border - Curtici - Simeria , component Part of the IV Pan - European Corridor for the Trains Circulation with maximum speed of 160 km/h"				Faza / Phase: PTH+CS / TD+TS				
Denumire desen / Drawing name: Statia CFR PĂULIȘ. Retea exteriora de canalizare apă uzată menajeră. Profil longitudinal prin canalizare. PĂULIȘ Railway Station. Wastewater sewerage network. Longitudinal profile.								
Scara / Scale		Revizia / Revision		Cod desen / Drawing Code				
Oriz - 1: 500; Vert. - 1: 50				PT.2A.03.04.IS.14.004				
				Nr / No 01/01				