


Profil longitudinal 1

Longitudinal profile no. 1

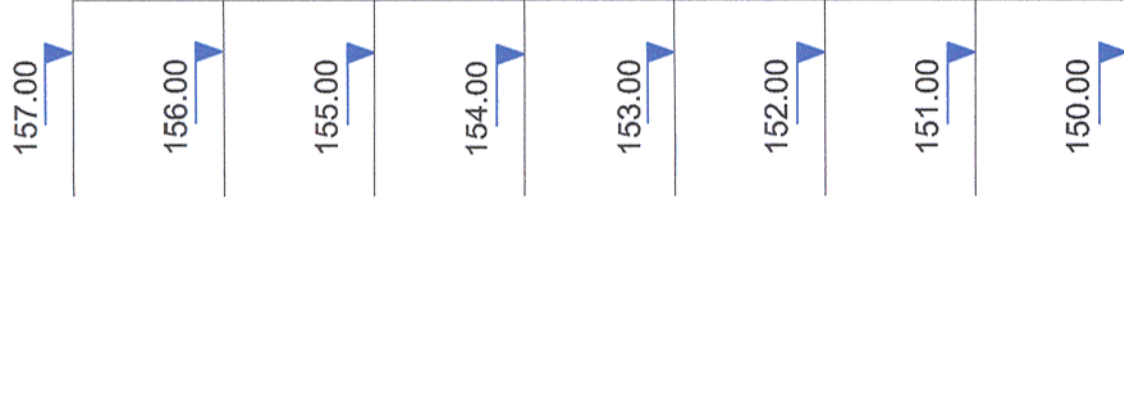

DENUMIRE CAMIN NUMBER OF CHAMBER	M1-SNU	M2	M5	M7	M8	M6	SPAU	M4	M5	M6
COTA TEREN AMENAJAT (CTA) APPLIANCE GROUND QUOTA	155.40	155.40	155.40	155.40	155.00	155.00	155.00	155.40	155.40	155.40
COTA CAPAC CAMIN (CC) CHAMBER COVER QUOTA	155.40	155.40	155.40	155.40	155.00	155.00	155.00	155.40	155.40	155.40
COTA RADIER CAMIN (ub) CHAMBER FOUNDATION QUOTA (tube)	155.40	155.40	155.40	155.40	155.00	155.00	155.00	155.40	155.40	155.40
ADANOME CAMIN DEPTH OF THE CHAMBER	2.00	2.33	2.67	2.73	2.42	2.82	2.86	1.37	1.39	2.67
DISTANTA INTRE CAMINE ON THE CENTER CHAMBER DISTANCE	2	26 m	42 m	7 m	11 m	50 m	5 m	21 m	2	14 m
DISTANTE CUMULATE LENGTH-ADDED	2	28	70	77	88	138	143	21	24	38
PANTA TUB CANALIZARE SEWAGE SLOAPE	i = 8 ‰									
DIAMETRU + MATERIAL TUB CANAL DIAMETER/TUBE MATERIAL	Tub PEGO, tip SN4, Ø 200 mm/ COPE tube, SN4 type, Ø 200 mm									


EXECUTAREA LUCRARILOR DE MONTAJ A RETELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELE DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

- * Cerința de calitate minima corespunzator nivelului de performanta este **Is** - in conformitate cu prevederile H.G. 925 - 1995.
- * Categoria de importanta a lucrarilor hidrotehnice este "**C**" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
- * *Minimum quality requirement adequate performance level are Is - in correspondance with G.R. 925 - 1995.*
- * *Importance class for hydrotechnical works is "C" (normal)) - in correspondance with STAS 2473 - 1983 forecast.*

Profil longitudinal 2

Longitudinal profile no. 2

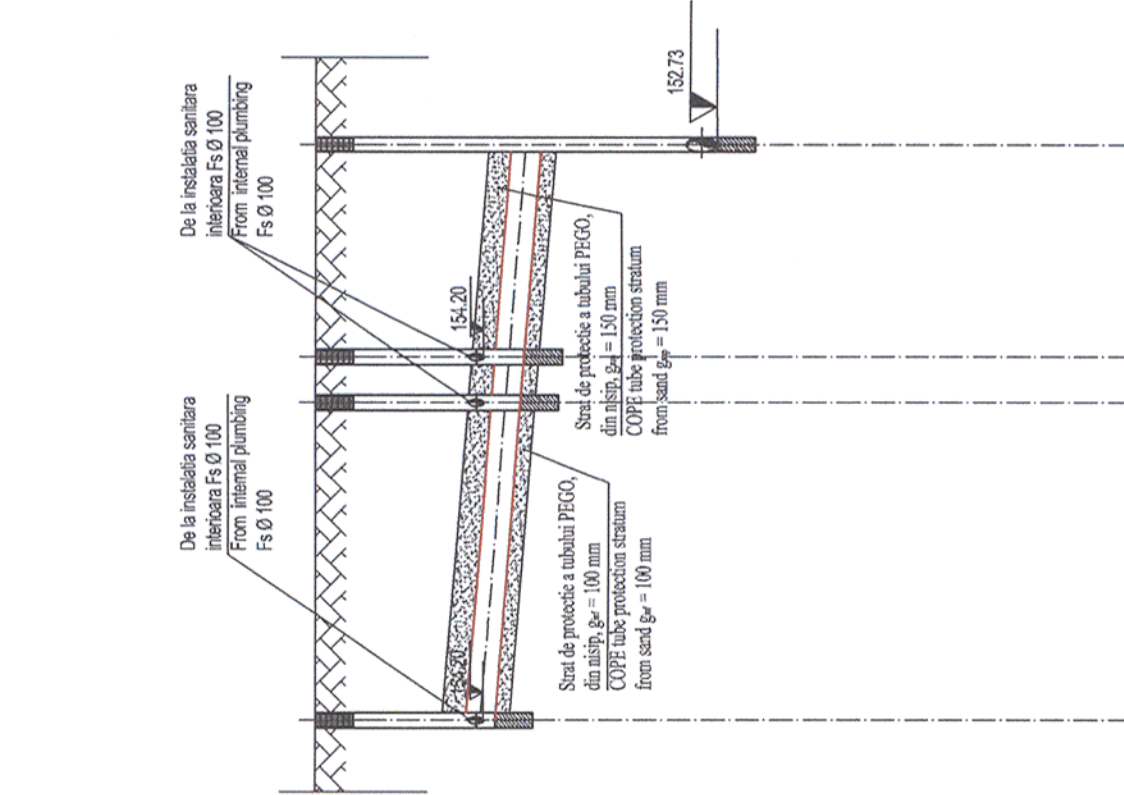

Verificator/ Expert Checker/ Expert	Cerința/ Requirement	Semnătură/ Signature	Referat/ Expertiză Report/ Expertise
		MINISTERUL TRANSPORTURILOR	
		BENEFICIAR / BENEFICIARY :  COMPANIA NAȚIONALĂ DE CĂL FERATE "CFR" SA	
PROIECTANT / DESIGNER:			
Aprobat Approved	Sef de echipa Team leader	C. Teodorescu	01.2013
Verificat Checked	Expert Cheile Key Expert	B. Goessler	01.2013
Subcontractant / Subcontractor			
			

NOTA / NOTE:

- * Prezentul plan se va consulta impreuna cu planurile: PT.2B.04.14.IS.07.001, PT.2B.04.14.IS.07.002, PT.2B.04.14.IS.07.006, PT.2B.04.14.IS.07.007, PT.2B.04.14.IS.07.008, PT.2B.04.14.IS.07.010 si PT.2B.04.14.IS.14.005.
- * Legenda se va citi in planul: PT.2B.04.14.IS.07.001.
- * The present design will be consult with the following drawings: PT. 2B.04.14.IS.07.001, PT.2B.04.14.IS.07.002, PT.2B.04.14.IS.07.006, PT.2B.04.14.IS.07.007, PT.2B.04.14.IS.07.008, PT.2B.04.14.IS.07.010 and PT.2B.04.14.IS.14.005.
- * The cartouche will be consult in the drawing no: PT.2B.04.14.IS.07.001.

