


Profil longitudinal 1

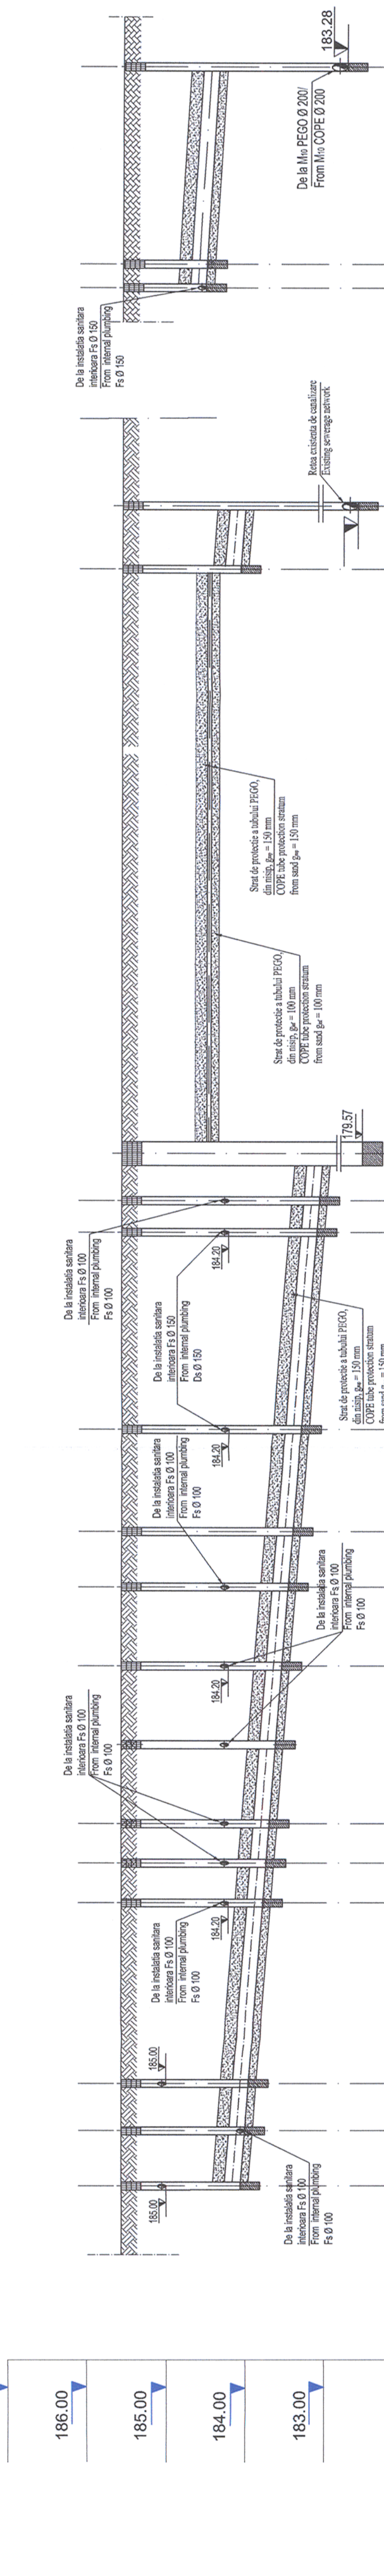


DENUMIRE CAMIN	M12	M13	M14	M16	M17	M18	M19	SPAU	M16c	
NUMBER OF CHAMBER										
COTA TEREN AMENAJAT APPLIANCE GROUND QUOTA	185.57	185.57	185.57	185.57	185.57	185.57	185.57	185.57	185.57	
COTA CAPAC CAMIN CHAMBER COVER QUOTA										
COTA RADIER CAMIN (tub) CHAMBER FOUNDATION QUOTA (tube)	184.00	183.94	183.89	183.87	183.82	183.70	183.66	183.62	183.21	
ADANCIME CAMIN DEPTH OF THE CHAMBER	1.57	1.63	1.68	2.08	2.19	2.25	2.56	2.64	1.57	
DISTANTA INTRU CAMINE ON THE CENTER CHAMBER DISTANCE	7 m	7 m	7 m	10 m	10 m	13 m	25 m	6 m	8 m	
DISTANTE CUMULATE LENGTH ADDED	0 m	7 m	14 m	57 m	67 m	77 m	84 m	97 m	103 m	
PANTA TUB CANALIZARE SEWAGE SLOPE	$i = 8 ‰$									
MATERIAL TUB CANALIZARE DIAMETER+TUBE MATERIAL	Tub PEGOP, tip SN4, Ø 200 mm/ COPE tube, SN4 type, Ø 200 mm									
	Teava PEHD, tip PE80, Ø 90 mm/ PEHD pipe, PE80 type, Ø 90 mm									

EXECUTAREA LUCRARILOR DE MONTAJ A RETELELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELOR DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

* Cerinta de calitate minima corespunzator nivelului de performanta este **Is** - in conformitate cu prevederile H.G. 925 - 1995.
 * Categoria de importanta a lucrarilor hidrotehnice este "**C**" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
 * Minimum quality requirement adequate performance level are **Is** - in correspondance with G.R. 925 - 1995.
 * Importance class for hydatotechnical works is "**C**" (normal) - in correspondance with STAS 2473 - 1983 forecast.

Profil longitudinal 2

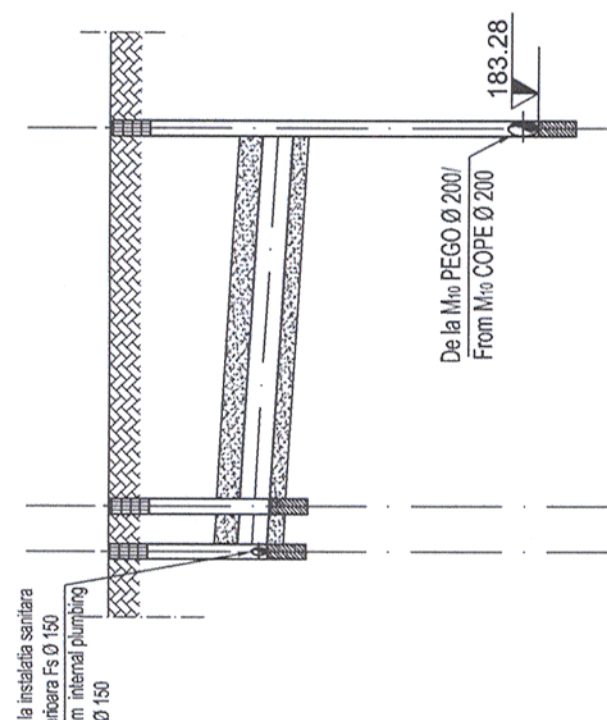

DENUMIRE CAMIN	M11	M12
NUMBER OF CHAMBER		
COTA TEREN AMENAJAT APPLIANCE GROUND QUOTA	185.57	185.57
COTA CAPAC CAMIN CHAMBER COVER QUOTA		
COTA RADIER CAMIN (tub) CHAMBER FOUNDATION QUOTA (tube)	183.97	183.97
ADANCIME CAMIN DEPTH OF THE CHAMBER	1.62	1.62
DISTANTA INTRU CAMINE ON THE CENTER CHAMBER DISTANCE	25 m	
DISTANTE CUMULATE LENGTH ADDED	0 m	25 m
PANTA TUB CANALIZARE SEWAGE SLOPE	$i = 8 ‰$	
MATERIAL TUB CANALIZARE DIAMETER+TUBE MATERIAL	Tub PEGOP, tip SN4, Ø 200 mm/ COPE tube, SN4 type, Ø 200 mm	

EXECUTAREA LUCRARILOR DE MONTAJ A RETELELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELOR DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

* Cerinta de calitate minima corespunzator nivelului de performanta este **Is** - in conformitate cu prevederile H.G. 925 - 1995.
 * Categoria de importanta a lucrarilor hidrotehnice este "**C**" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
 * Minimum quality requirement adequate performance level are **Is** - in correspondance with G.R. 925 - 1995.
 * Importance class for hydatotechnical works is "**C**" (normal) - in correspondance with STAS 2473 - 1983 forecast.

NOTA /NOTE:
 * Prezentul plan se va consulta impreuna cu planurile: PT.03.03.26.IS.07.001, PT.03.03.26.IS.07.006, PT.03.03.26.IS.07.008;
 * Legenda se va citi in planul: PT.03.03.26.IS.14.008.
 * The present design will be consult with the following drawings: PT.03.03.26.IS.07.001, PT.03.03.26.IS.07.006, PT.03.03.26.IS.07.008;
 * The cartouche will be consult in the drawing no: PT.03.03.26.IS.14.008.

MINISTERUL TRANSPORTURILOR

COMPANIA NAȚIONALĂ DE CĂI FERATE "CFR" SA

PROIECTANT / DESIGNER: **PÖYRY**

Subcontractant / Subcontractor: **VIOTOP**

Approbat / Approved	Sef de echipa / Team leader	C. Teodorescu	01.2013	Date / Date	Semnatura / Signature
Verificat / Checked	Expert Chele / Key Expert	B. Goessler	01.2013	Date / Date	Semnatura / Signature

APROBAT / APPROVED: A.M. Baicu
 PROIECTAT / DESIGNED: FI. Duta

Verificator / Expert: Cerinta / Requirement
 Semnatura / Signature
 Referat / Expertiza: Report / Expertise

"Reabilitarea liniei c.f. Frontiera - Curtici - Simeria, parte componentă a Coridorului IV Pan - European Corridor for the Trains Circulation with maximum speed of 160 km/h"
 Tronsoanel 3: Gurasada - Simeria / LOT 3

Denumire desen / Drawing name: Haia de mentenanță DEVA. Rețea exterioră de canalizare menajeră și pluvială. Profil longitudinal la prin canale 1-2 / DEVA Maintenance Bay. The wastewater and rainwater sewerage network. Longitudinal profiles no. 1 - 2.

Scara / Scale: Vert. - 1 : 50
 Revizia / Revision: Cod desen / Drawing Code: PT.03.03.26.IS.14.009
 Nr / No: 01/01