


Profil longitudinal 8 Longitudinal profile no. 8

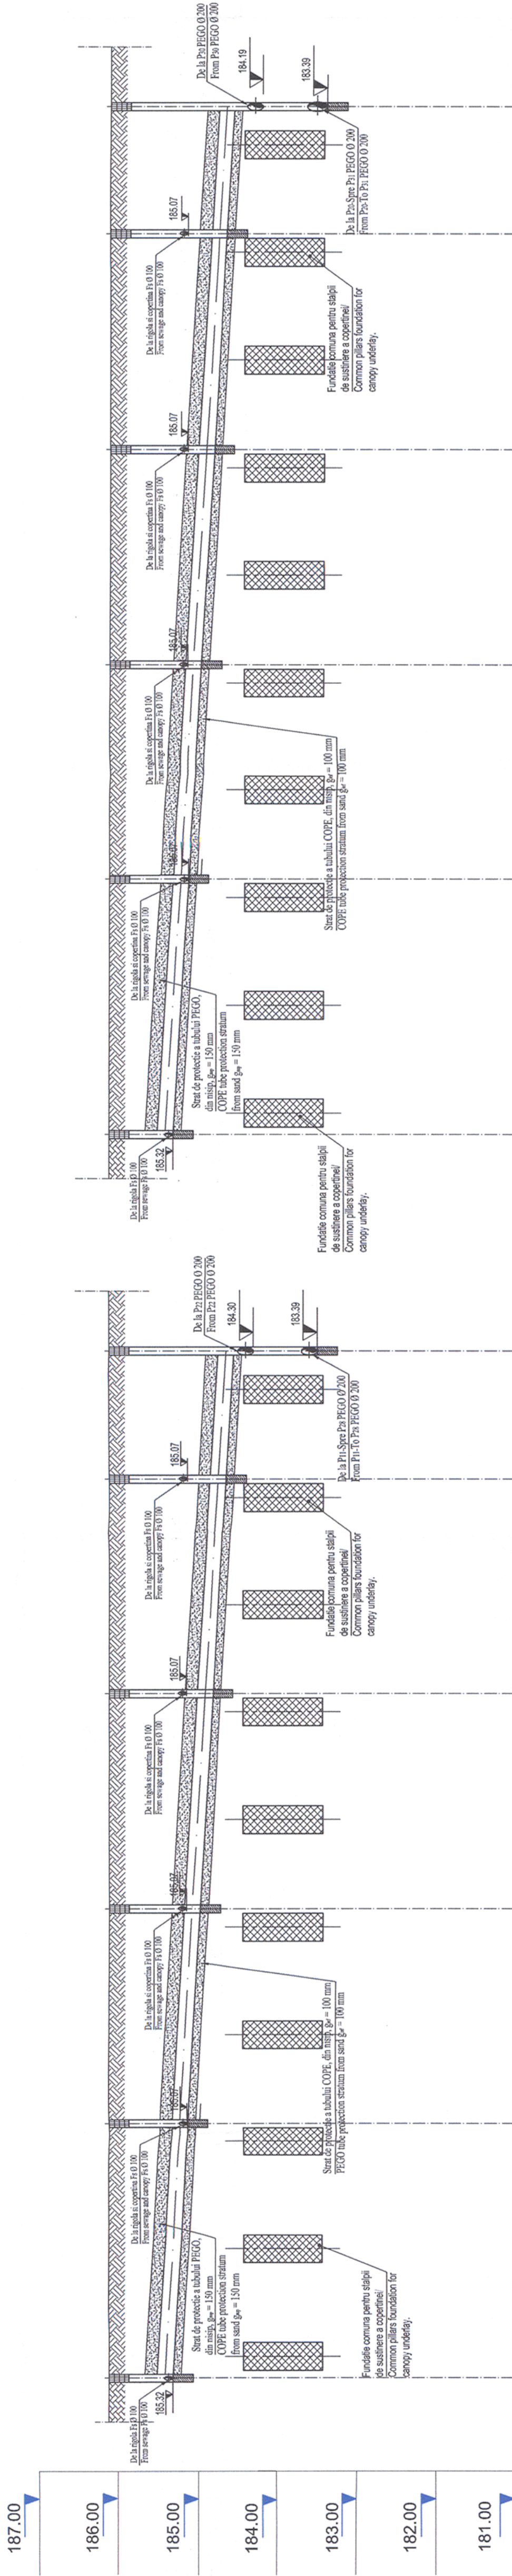

DE NUMIRE CAMIN NUMBER OF CHAMBER	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24	P25	P26	P27	P28
COTA TEREN AMENAJAT APPLIANCE GROUND QUOTA	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12
COTA CAPAC CAMIN CHAMBER COVER QUOTA	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12	186.12
COTA RADIER CAMIN (tab) CHAMBER FOUNDATION QUOTA (tab)	185.32	185.32	184.97	184.80	184.64	183.39	183.39	185.13	185.32	185.13	184.97	184.80	184.64	184.55
ADANCIME CAMIN DEPTH OF THE CHAMBER	0.80	0.99	1.15	1.32	1.48	2.63	2.73	0.99	0.80	0.99	1.15	1.32	1.48	2.73
DISTANTA INTRE CAMINE ON THE CENTER CHAMBER DISTANCE		32 m	27 m	27 m	16 m	16 m	16 m	32 m	0 m	32 m	27 m	27 m	27 m	16 m
DISTANTE CUMULATE LENGTH ADDED			59 m	86 m	113 m	129 m	129 m	161 m	161 m	193 m	220 m	247 m	274 m	290 m
PANTA TUB CANALIZARE SEWAGE SLOPE	$i = 6 ‰$													
DIMETRU + MATERIAL TUB CANAL DIAMETER/TUBE MATERIAL	Tub PEGO, tip SN4 Ø 200 mm													

EXECUTAREA LUCRARILOR DE MONTAJ A RETELELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIELELE DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

* Cerinta de calitate minima corespunzator nivelului de performanta este Is - in conformitate cu prevederile H.G. 925 - 1995.
 * Categoria de importanta a lucrarilor hidrotehnice este "C" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
 * Minimum quality requirement adequate performance level are Is - in correspondance with G.R. 925 - 1995.
 * Importance class for hydrotechnical works is "C" (normal) - in correspondance with STAS 2473 - 1983 forecast.

Profil longitudinal 9 Longitudinal profile no. 9

NOTA / NOTE:

* Prezentul plan se va consulta impreuna cu planurile: PT.03.03.26.IS.05.001, PT.03.03.26.IS.14.001, PT.03.03.26.IS.14.002, PT.03.03.26.IS.14.003, PT.03.03.26.IS.14.004 si PT.03.03.26.IS.14.006.
 * Legenda se va citi in planuri: PT.03.03.26.IS.14.001.

*The present design will be consult with the following drawings:
 PT.03.03.26.IS.05.001, PT.03.03.26.IS.14.001, PT.03.03.26.IS.14.002, PT.03.03.26.IS.14.003, PT.03.03.26.IS.14.004 and PT.03.03.26.IS.14.006.
 * The cartouche will be consult in the drawing no: PT.03.03.26.IS.14.001



Verificator / Expert Checker / Expert	Cerinta Requirement	Semnatura Signature	Referat / Expertiza Report / Expertise
European Investment Bank	MINISTERUL TRANSPORTURILOR		
PROIECTANT / DESIGNER:	COMPANIA NATIONALA DE CAI FERATE "CFR" SA		
Approved	Seft de echipa Team leader	C. Teodorescu	01.2013
Verified	Expert Cheile Key Expert	B. Goessler	01.2013
Checked	Subcontractant / Subcontractor	VIOTOP	
Approved	Adjunct Seft de echipa Deputy Team leader	A.M. Baicu	01.2013
Designed	Inginer Engineer	Fl. Duta	01.2013
Reabilitarea liniei c.f. Frontiera - Curtici - Simeria, parte componenta a Coridorului IV Pan - European pentru circulatia trenurilor cu viteza maxima de 160 km/h			
Rehabilitation of the Railway Line Border - Curtici - Simeria, component Part of the IV Pan - European Corridor for the Trains Circulation with maximum speed of 160 km/h			
Denumire desen / Drawing name: Statiia CFR DEVA. Relea exteriora de canalizare pluviala. Profile longitudinale prin canalizare 8 - 9. DEVA Railway Station. Rainwater sewerage network. Longitudinal profiles no. 8 - 9.			
Scara / Scale	Revizia / Revision	Cod desen / Drawing Code	Nr / No
Oriz - 1: 500; Vert. - 1:50		PT.03.03.26.IS.14.005	01/01