




NOTA / NOTE:

- * Prezentul plan se va consulta impreuna cu planurile: PT.03.03.28.IS.07.001, PT.03.03.28.IS.07.002, PT.03.03.28.IS.14.007 si PT.03.03.28.IS.14.009.
- * Legenda se va citi in planuri: PT.03.03.28.IS.14.007.
- * The present design will be consult with the following drawings: PT.03.03.28.IS.07.001, PT.03.03.28.IS.07.002, PT.03.03.28.IS.14.007 and PT.03.03.28.IS.14.009.
- * The carouche will be consult in the drawing no: PT.03.03.28.IS.14.007.

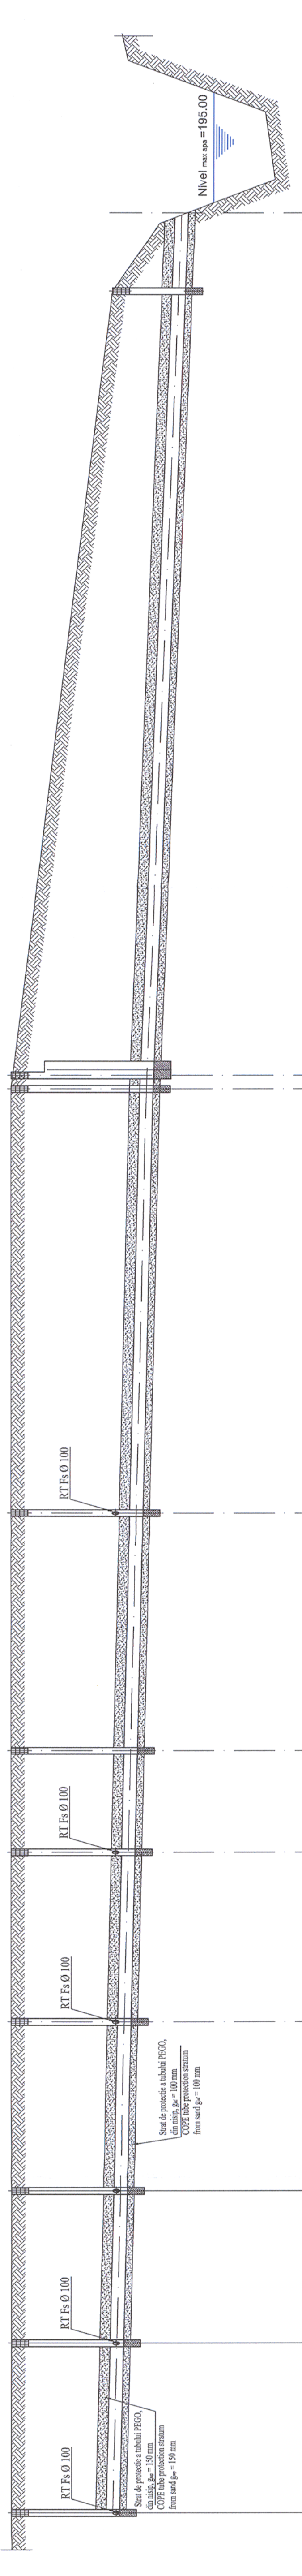

	P ₁	P ₂	P ₃	P ₄	P ₅	P ₆	P ₇	SNH P ₈	P ₉	GVE
DENUMIRE CAMIN										
NUMBER OF CHAMBER										
COTA TEREN AMENAJAT	198.00	198.00	198.00	198.00	198.00	198.00	198.00	198.00	196.50	195.80
APPLIANCE GROUND QUOTA										
COTA CAPAC CAMIN	198.00	198.00	198.00	198.00	198.00	198.00	198.00	198.00	196.50	195.80
CHAMBER COVER QUOTA	196.40	196.34	196.29	196.23	196.17	196.13	196.05	195.90	195.44	195.40
COTA RADIER CAMIN (tub)	196.40	196.34	196.29	196.23	196.17	196.13	196.05	195.89	195.44	195.40
CHAMBER FOUNDATION QUOTA (tub)	196.40	196.34	196.29	196.23	196.17	196.13	196.05	195.89	195.44	195.40
ADANCIME CAMIN	1.50	1.56	1.71	1.77	1.83	1.87	1.95	2.33	1.06	
DEPTH OF THE CHAMBER										
DISTANTA INTRE CAMINE	10 m	10 m	9 m	10 m	10 m	6 m	14 m	25 m	45 m	4 m
ON THE CENTER CHAMBER DISTANCE										
DISTANTE CUMULATE	0	10	19	29	39	45	59	68	131	135
LENGTH ADDED										
PANTA TUB CANALIZARE	i = 6 ‰									
DIAMETRU TUB CANALIZARE	Tub PEGO, tip SN4, Ø 200 mm/									
MATERIAL TUB CANALIZARE	COPE tube, SN4 type, Ø 200 mm									
DIAMETER-TUBE MATERIAL	i = 1 ‰									

EXECUTAREA LUCRARILOR DE MONTAJ A RETELOR DE ALIMENTARE CU APA SI CANALIZARE SE VA FACE CU RESPECTAREA PRESCRIPTIILOR DIN CAIETELE DE SARCINI SPECIFICE ACESTOR TIPURI DE LUCRARI.

THE EXECUTION OF THE FIXING WORKS FOR WATER SUPPLY AND SEWERAGE NETWORK WILL BE CARRIED OUT ACCORDING TO THE PROVISIONS OF THE TECHNICAL SPECIFICATIONS THAT ARE INTENDED FOR THIS TYPES OF WORKS.

* Cerinta de calitate minima corespunzator nivelului de performanta este Ia - in conformitate cu prevederile H.G. 925 - 1985.
 * Categoria de importanta a lucrarilor hidrotehnice este "C" (normala) - in conformitate cu prevederile STAS 2473 - 1983.
 * Minimum quality requirement adequate performance level are Ia - in correspondance with G.R. 925 - 1985.
 * Importance class for hydrotechnical works is "C" (normal) - in correspondance with STAS 2473 - 1983 forecast.

Verificator/Expert Checker/Expert	Cerinta/Requirement	Semnatura/Signature	Referat/Expertiza Report/Expertise
BENEFICIAR / BENEFICIARY : COMPANIA NATIONALA DE CAI FERATE "CFR" SA			
PROIECTANT / DESIGNER: 		Semnatura Signature	
Approbat Approved	Sef de echipa Team leader	C. Teodorescu	01.2013
Verificat Checked	Expert Cheile Key Expert	B. Goessler	01.2013
Subcontractant / Subcontractor			
Approbat Approved	Adjunct Sef de echipa Deputy Team leader	A.M. Baicu	01.2013
Proiectat Designed	Proiectant Designer	Fl. Duta	01.2013
"Reabilitarea liniei c.f. Frontiera - Curtici - Simeria, parte componenta a Coridorului IV pentru circulatia trenurilor cu viteza maxima de 160 km/h" Pan - European Pan - European Corridor for the Trains Circulation with maximum speed of 160 km/h" Trosionul 3: Gurasada - Simeria/ LOT 3			
Project 9j		35311.1	
Faza / Phase: PTh +CS / TD + TS			
Denumire desen / Drawing Title : Ciadire mentenanta SIMERIA. Retea exterioara de canalizare pluviala. Profil longitudinal prin canalizare. SIMERIA. Maintenance Bay. Rainwater sewerage network. Longitudinal profile.			
Scara / Scale	Revizia/Revision	Cod desen / Drawing Code	Nr / No
Oriz - 1: 200; Vert. - 1: 50		PT.03.03.28.IS.14.008	